

Data Sheet

1150 Ergo Fall Arrest Harness AS/NZS1891.1 - 2007

Description

Fall Arrest Harness c/w Confined Space Rescue Loops, orange webbing upper body with blue webbing leg and sub pelvic straps. Front and rear fall arrest D ring attachments, permanently attached energy absorbing lanyard 1.8m

Materials

- 30kN 44mm polyester harness webbing
- Steel 2/3 bar Buckles
- Passivated zinc coated steel parabolic fall arrest "D" salt spray tested to U.S. ANSI specification
- UV Stabilised elastic web tidies
- Colourfast UV resistant webbing
- Colourfast UV resistant sewing thread

Testing

- 5 stage inspection process during manufacture
- 100 % visual inspection
- Tested to dynamic 3.8 metre head up and head down drop test, as well as static 15kN head up and 10kN head down to AS/NZS 1891.1-2007

Features


- Lightweight
- Corrosion resistant steel buckles
- Fully adjustable shoulder and leg straps
- AS 1891.1- 2007 Certified
- Fall arrest anchorage points clearly marked
- Easy to fit
- No restriction
- Breathable rear mesh panel aids donning
- Individually serial numbered
- Simple to adjust
- 1.8 metre attached fall arrest lanyard

Variants

- Weight 1150 Ergo - 1950g
- Weight 1150 Ergo - Loops 1852g
- Weight 1150 Ergo - QB (Quick Connect Buckle) 2136g
- Weight 1150 Ergo - Loops -QB (Quick Connect Buckle) 2038g



1150 Ergo - Loop Option

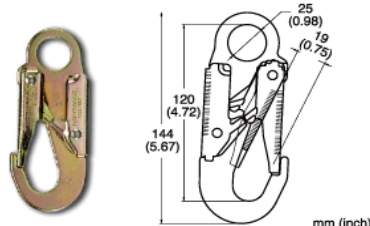

Made in Australia by
SpanSet Australia Ltd

13 Pullman Place, Emu Plains, NSW, Australia, 2750
Phone: (02) 4735 3955 Fax: (02) 4735 363
Copyright © 2009 SpanSet Australia Ltd
www.spanset.com.au